

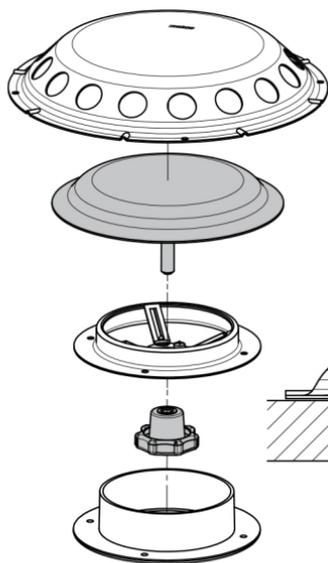


The underside of the flange should be coated with a thin layer of silicon sealant.
 Die Unterseite des Flansches muss mit einer dünnen Schicht Silikonkitt versehen werden.
 Il faudra appliquer une fine couche de mastic silicone sur la partie inférieure de la bride.
 La parte inferior del reborde debe cubrirse con una fina capa de sellador de silicona.
 Sul lato inferiore della flangia deve essere applicato un leggero strato di mastice siliconico

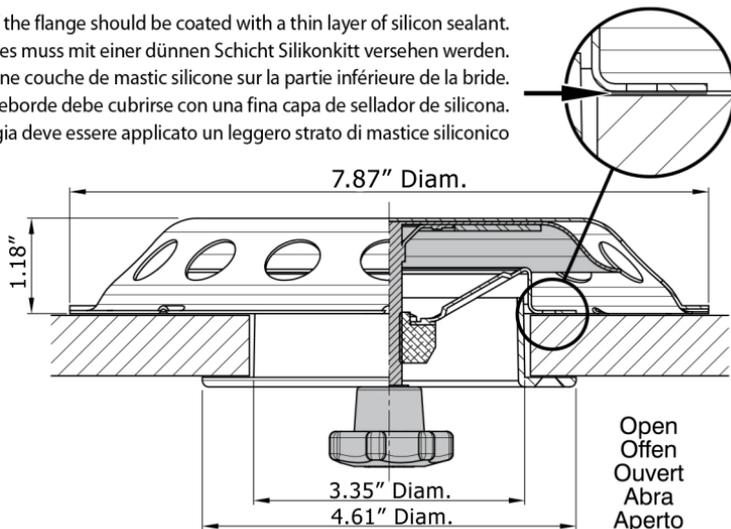

Net opening size
 Nettodurchlaß
 Passage net
 Conducto neto
 Dimensioni retali relative

Max.
 30.7 cm²
 (4.7 sq. ins.)

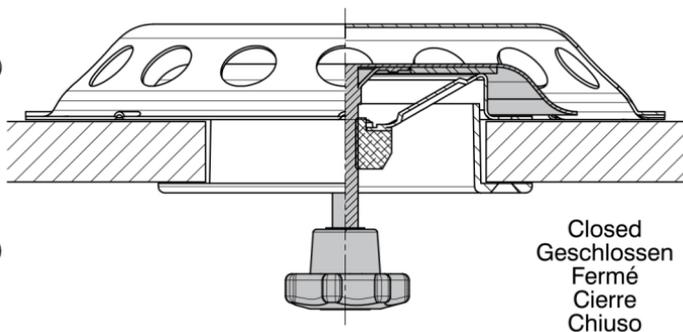

UFO2

Vetus b.v.